


AMP Cable: Mono Installation

(Integrated Audio/Mic/Power Cable)

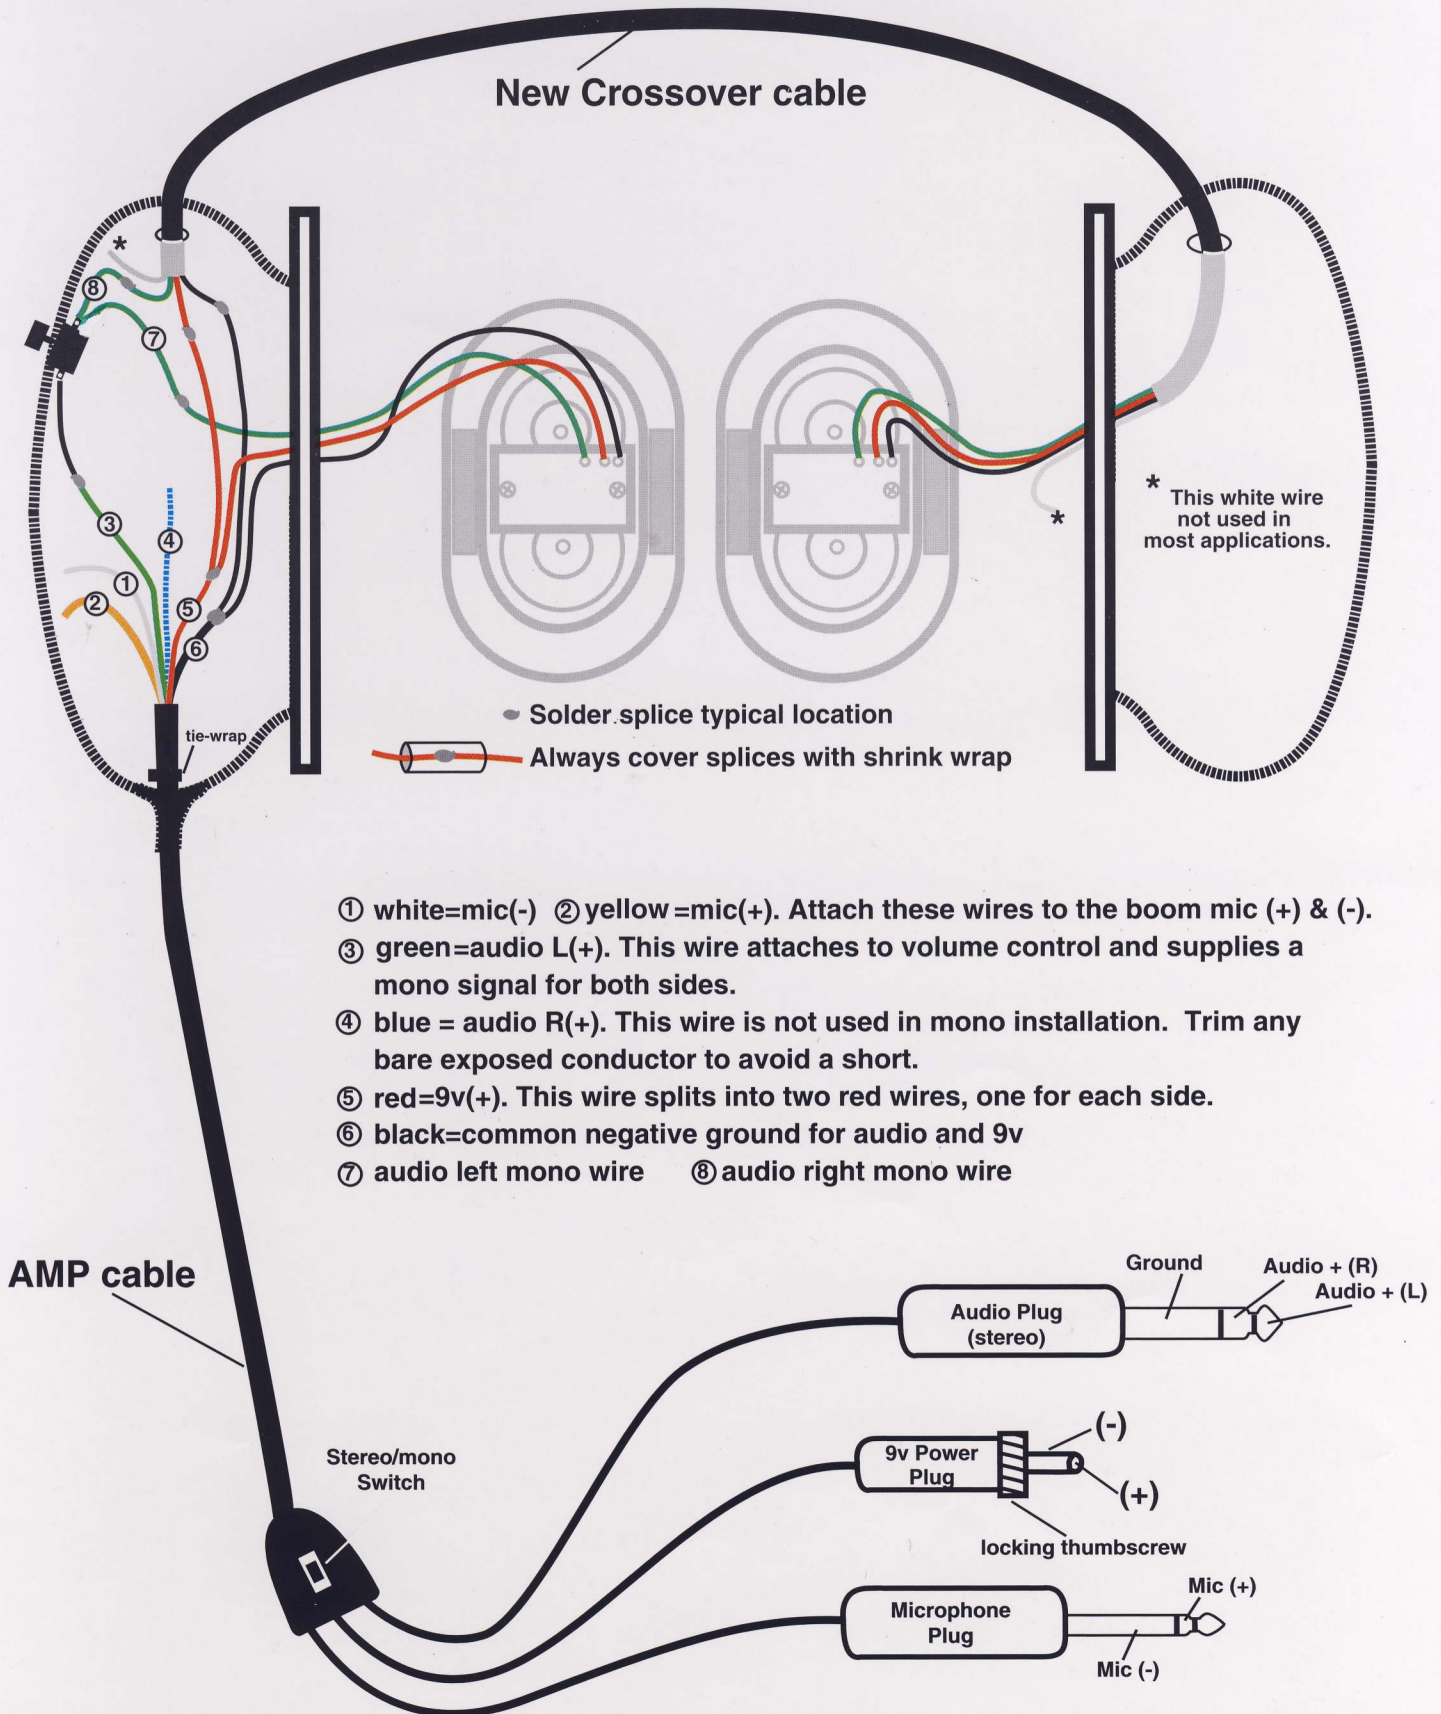

- ① white=mic(-) ② yellow =mic(+). Attach these wires to the boom mic (+) & (-).
- ③ green=audio L(+). This wire attaches to volume control and supplies a mono signal for both sides.
- ④ blue = audio R(+). This wire is not used in mono installation. Trim any bare exposed conductor to avoid a short.
- ⑤ red=9v(+). This wire splits into two red wires, one for each side.
- ⑥ black=common negative ground for audio and 9v
- ⑦ audio left mono wire ⑧ audio right mono wire

AMP Cable: Stereo Installation

(Integrated Audio/Mic/Power Cable)

